
MKK SERIES-AXIAL LOCKING



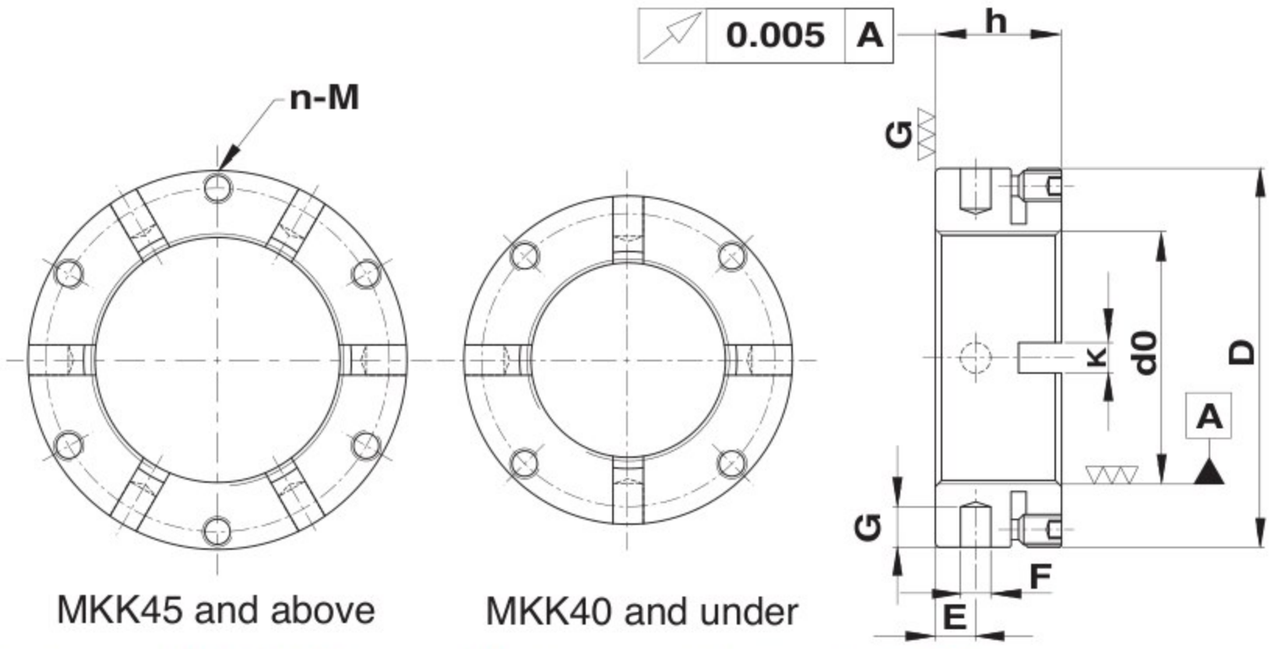

MKK45 and above

MKK40 and under

■ Material: JIS SCM440 / DIN42CrMo4 ■ Hardness: HRC28-32 ■ Maximum axial run-out: 0.005 mm
■ The contact surface is produced by a high precision **grinding** process.

Order No.	Dimensions in mm							Clamping Screw Data	
Name	d0_ISO 4H	D	h	K	E	F	G	n-M	Max. Torque_Nm
MKK15X1.0P	M15X1	30	18	4	5	4	5	4-M5	4.8
MKK17X1.0P	M17X1	32	18	4	5	4	5	4-M5	4.8
MKK20X1.0P	M20X1	38	18	4	5	4	6	4-M6	8
MKK25X1.5P	M25X1.5	45	20	5	6	5	6	4-M6	8
MKK30X1.5P	M30X1.5	52	20	5	6	5	7	4-M6	8
MKK30/65	M30X1.5	65	30	6	6	6	8	4-M6	8
MKK35/58	M35X1.5	58	20	5	6	5	7	4-M6	8
MKK35X1.5P	M35X1.5	65	22	6	6	6	8	4-M6	8
MKK40X1.5P	M40X1.5	65	22	6	6	6	8	4-M6	8
MKK40/85	M40X1.5	85	32	6	6	6	8	4-M6	8
MKK45X1.5P	M45X1.5	70	22	6	6	6	8	6-M6	8
MKK50X1.5P	M50X1.5	75	25	6	8	6	8	6-M6	8
MKK55X2.0P	M55X2	85	26	6	8	6	8	6-M8	19
MKK60X2.0P	M60X2	90	26	6	8	6	8	6-M8	19
MKK65X2.0P	M65X2	100	26	8	8	8	10	6-M8	19
MKK70X2.0P	M70X2	100	28	8	9	8	10	6-M8	19
MKK75X2.0P	M75X2	115	30	8	10	8	10	6-M10	36
MKK80X2.0P	M80X2	110	30	8	10	8	10	6-M10	36
MKK85X2.0P	M85X2	115	30	8	10	8	10	6-M10	36
MKK90X2.0P	M90X2	130	32	8	13	8	10	6-M10	36
MKK95X2.0P	M95X2	130	30	8	10	8	10	8-M10	36
MKK100X2.0P	M100X2	130	30	8	10	8	10	8-M10	36
MKK110X2.0P	M110X2	140	30	8	10	8	10	8-M10	36
MKK120X2.0P	M120X2	155	30	8	10	8	10	8-M10	36
MKK130X2.0P	M130X2	165	30	8	10	8	10	8-M10	36

■ When ordering above products, please refer to the Name. For example: MKK30x1.5P
■ If a left hand thread is required, please notify “L” after the Name. For example: MKK30x1.5P-L
■ If an inch thread is required, please notify “U” after the Name. For example: MKK30-U18