

SFZ SERIES-30° FLANK LOCKING

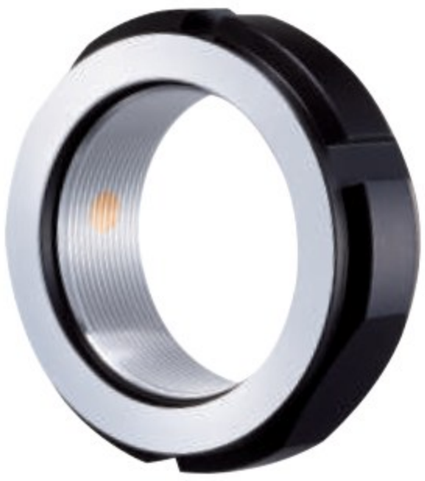

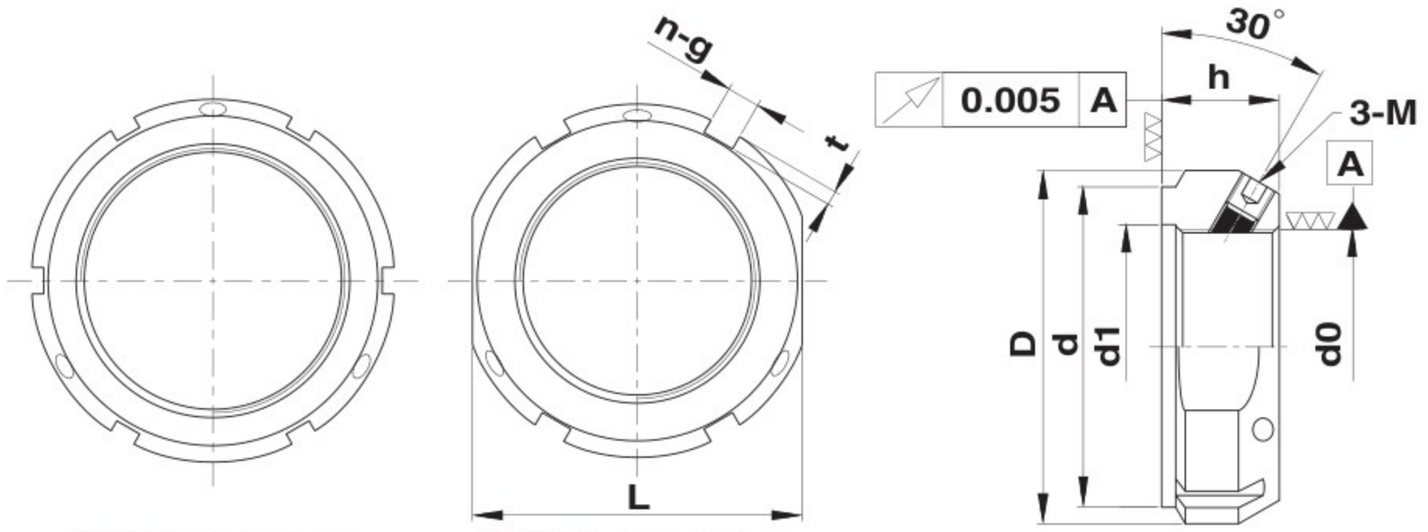

SFZ80 and above SFZ75 and under

■ Material: JIS SCM440 / DIN42CrMo4 ■ Maximum axial run-out: 0.005 mm
■ The contact surface and thread area are all produced by a high precision turning process.

Order No.	Dimensions in mm								n	Set Screw Data	
Name	d0_ISO 4H	D	h	d	d1	g	t	L		3-M	Max. Torque_Nm
SFZ10X0.75P	M10X0.75	28	14	23	11	4	2	24	4	M5	4.8
SFZ12X1.0P	M12X1	30	14	25	13	4	2	27	4	M5	4.8
SFZ15X1.0P	M15X1	33	16	28	16	4	2	30	4	M5	4.8
SFZ17X1.0P	M17X1	37	18	33	18	5	2	34	4	M6	8
SFZ20X1.0P	M20X1	40	18	35	21	5	2	36	4	M6	8
SFZ20X1.5P	M20X1.5	40	18	35	21	5	2	36	4	M6	8
SFZ25X1.5P	M25X1.5	44	20	39	26	5	2	41	4	M6	8
SFZ30X1.5P	M30X1.5	49	20	44	32	5	2	46	4	M6	8
SFZ35X1.5P	M35X1.5	54	22	49	38	5	2	50	4	M6	8
SFZ40X1.5P	M40X1.5	65	22	59	42	6	2.5	60	4	M8	19
SFZ45X1.5P	M45X1.5	70	22	64	48	6	2.5	65	4	M8	19
SFZ50X1.5P	M50X1.5	75	25	68	52	7	3	70	4	M8	19
SFZ55X2.0P	M55X2	85	25	78	58	7	3	80	4	M8	19
SFZ60X2.0P	M60X2	90	26	82	62	8	3.5	85	4	M8	19
SFZ65X2.0P	M65X2	95	28	87	68	8	3.5	90	4	M8	19
SFZ70X2.0P	M70X2	100	28	92	72	8	3.5	95	4	M8	19
SFZ75X2.0P	M75X2	105	28	97	77	8	3.5	100	4	M8	19
SFZ80X2.0P	M80X2	110	32	100	83	8	3.5	-	6	M8	19
SFZ85X2.0P	M85X2	120	32	110	88	10	4	-	6	M10	36
SFZ90X2.0P	M90X2	125	32	115	93	10	4	-	6	M10	36
SFZ95X2.0P	M95X2	130	32	120	98	10	4	-	6	M10	36
SFZ100X2.0P	M100X2	135	32	125	103	10	4	-	6	M10	36
SFZ110X2.0P	M110X2	145	32	134	112	10	4	-	6	M10	36
SFZ120X2.0P	M120X2	155	32	144	122	10	4	-	6	M10	36
SFZ130X2.0P	M130X2	165	32	154	132	12	5	-	6	M10	36
SFZ140X2.0P	M140X2	175	32	164	142	14	6	-	6	M10	36
SFZ150X2.0P	M150X2	185	32	174	152	14	6	-	6	M10	36
SFZ160X3.0P	M160X3	195	32	184	162	14	6	-	6	M10	36
SFZ170X3.0P	M170X3	205	32	194	172	14	6	-	6	M10	36
SFZ180X3.0P	M180X3	215	32	204	182	16	7	-	6	M10	36
SFZ190X3.0P	M190X3	225	32	214	192	16	7	-	6	M10	36
SFZ200X3.0P	M200X3	235	32	224	202	18	8	-	6	M10	36

■ When ordering above products, please refer to the Name. For example: SFZ30x1.5P
■ If a left hand thread is required, please notify “L” after the Name. For example: SFZ30x1.5P-L
■ If an inch thread is required, please notify “U” after the Name. For example: SFZ30-U18